



NVS2801



Compatible!

Data verification via CRC32



Cushioned jacket protects your hard drive.



Small & Light

- Palmtop size and light weight (430g/15oz).
- Perfect companion for Documentary DP.



Preview 2K / 4K and Audio

- Show video on 2.4' TFT LCD.
(Limited preview performance for 4K. Playback is slow motion at 1Fr. per 10 sec.)
- DV, DVCPRO HD • AVCHD, H.264, AVC-Intra
- MPEG2 4:4:4 / 4:2:2 / 4:2:0
- XAVC 2K/4K, AVC Ultra 2K/4K
- XF-AVC 2K/4K, PRORES 2K/4K, DNxHD 2K/4K
- ARRI RAW, RED RAW (Thumbnail only)
- Preview audio via 2-pin ear bud.



Simultaneously Backup up to TWO drives with a single operation (MCopy)

- Create two copies with 1 internal hard drive and 1 external USB3.0 (or RAID) drive.



Limitless Capacity

- Easy user interchangeability of hard drive.
- Compatible with 2.5' SATA HDD/SSD.
(9.5mm or less height)



Backup from Various Memory Cards

- Built in SxS / CFast / SDXC slot.
- Supports XQD / P2 / CF through optional adapter.
- Supports FAT32, exFAT, UDF, HFS+.



Incremental Copy


- Copy only the data that have changed since the last backup.
- Retains the deleted file from the card in a special folder (NVS - Trash).

Dealer Inquiries
800-999-1984



Distributed Exclusively by

international supplies Since 1984
© innovation → market

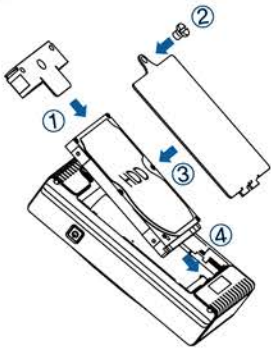

Exchangeable Internal Drive

The internal drive of NVS2801 can be exchanged by user.


- ① Insert silicon rubber jacket to the hard drive or SSD.
- ② Use a coin to loosen the screws on the aluminum back cover.
- ③ Remove the back cover to the NVS2801.
- ④ Slide the drive into the internal drive slot of the NVS2801.

- Top slot for CFast cards - no need for an adapter.
- Second top slot for SD/SDHC/SDXC.
- Slot for SxS on the Side.
- CRC32 Verification.
- Simultaneous Backup to 2 Drives.
- A USBHOST slot that will power an attached card reader.
- SSD or HDD internal memory - user swappable, unlimited capacity.
- Up to 400mb/sec. write speed with SSD.
- Preview ARRI RAW and RED RAW (thumbnails only)
- Second non-powered USB HOST slot for attaching an external drive for SYNC (external power required for this function).
- Optional 4K pack will be available for preview of 4K footage.

Technical Specifications

NVS2801

Model Name	NEXTO VIDEO STORAGE Doc
Model Number	NVS2801
LCD	2.4" Color TFT LCD: 320*240, 64K color
Memory Support	Built in slot : SxS(Pro/Pro+/-1), CFast(1.1&2.0), SD(SDHC/SDxC with UHS support)
Storage	Internal Drive : 2.5" SATA hard drive with 9.5mm and less height.
File System	Memory card : FAT16/32, exFAT, UDF, HFS+
Video Preview	DV, DVCPRO HD XF-AVC 2K/4K, PRORES 2K/4K AVCHD, H.264, AVC-Intra DNxHD 2K/4K MPEG2 4:4:4 / 4:2:2 / 4:2:0 ARRI RAW (Thumbnail only) XAVC 2K/4K, AVC Ultra 2K/4K RED RAW (Thumbnail only)
Internal Battery	Rechargeable Li-Poly battery, 3.7V 4400mAh Operating time after full charge : 120min Rechargeable via AC adapter(5hrs), USB cable(12hrs)
Computer I/F	USB 3.0 : 5Gbit/sec
OS compatibility	Windows XP / VISTA / 7 / 8 / 10 (Windows XP requires exFAT patch update) MAC OS 10.6.5 or later, Linux 2.4.18 or later
Power	Recommended : DC 12V/2A Operational range : DC 6~25V Operated by USB bus power during the computer connection
Weight	430g / 0.95lb (with hard drive)
Dimension	154 x 91 x 33 (mm) / 6 x 3.6 x 1.3 (inches)
Contents	NVS2801 main unit / AC power adapter / USB3.0 cable / Rubber bumpers / Manual

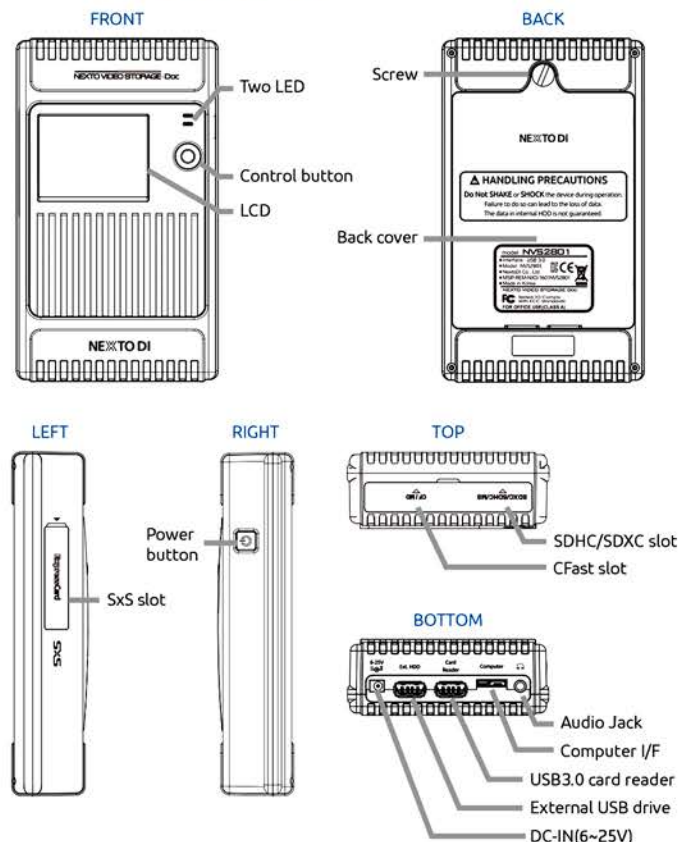

Dealer Inquiries
800-999-1984



Distributed Exclusively by

international supplies Since 1984
innovation → market

V2.APRIL2016